

Power Entry Modules

Bolt-in Rear Terminals

For Medical Purpose Applications

10-BPF Series



Features


- Ideally suited for products that must conform to FCC part 15 regulations
- Metal case offers high performance
- Meets over voltage of IEC 664 category II and complies with IEC 950
- Uses IEC connector that meets most safety standards
- Operating temperature: -25°C to +70°C
- Compact configuration
- Low leakage current

Applications

- Digital equipment
- Personal computers and peripherals
- Measuring instruments
- Monitor and display units



Circuit Diagram

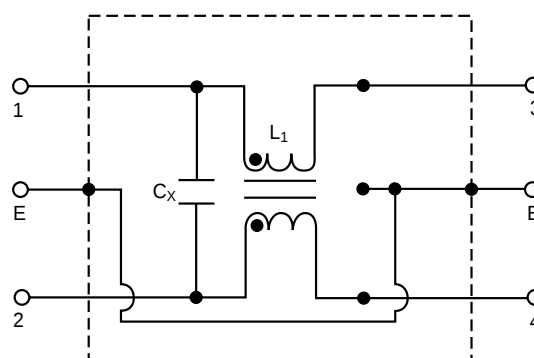

Specifications

Model	Rated Voltage (@ 50/60Hz)	Rated Current	Leakage Current (Max.)	Capacitance C_x	Inductance (L_1)	Circuit Diagram	Figure	Temperature Rise (Max.)
10-BPF-001-2-A	120/250VAC	1A	5uA	0.01uF	3.0mH	1	A	30°C
10-BPF-003-2-A					1.5mH			
10-BPF-006-2-A		10A			0.5mH			


Note: Test voltage: 1500VAC one minute, line to ground
 Insulation resistance: 300 Mohm min. at 500VDC
 Voltage drop: 1V max. at rated current
 Weight: 45g
 Input: Compatible with IEC-320

Power Entry Modules


Bolt-in Rear Terminals

For Medical Purpose Applications


10-BPF Series

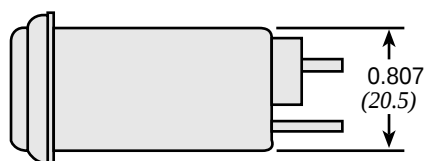


Dimensions in inches (mm)

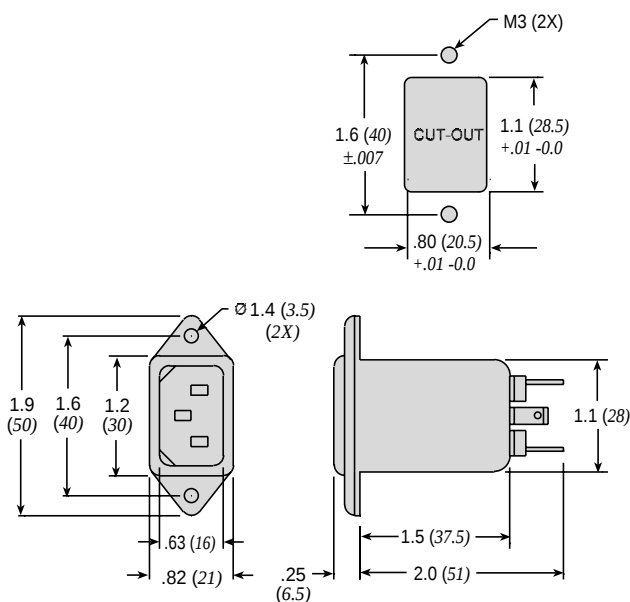


Common Mode

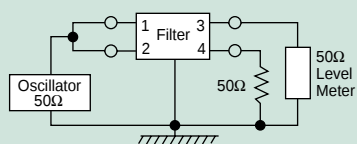

10-BPF-001;-003;-006

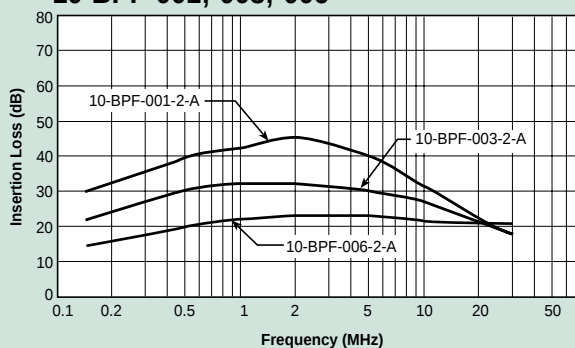

Normal Mode

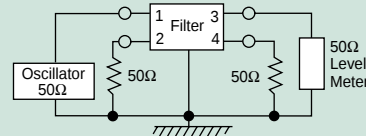

10-BPF-001;-003;-006

