

Power Entry Modules Bolt-in Right Angle Terminals for PCB Applications

60-BPP Series

Features

- Ideally suited for products that must conform to FCC part 15 regulations
- Metal case offers high performance
- Meets over voltage of IEC 664 category II and complies with IEC 950
- Uses IEC connector that meets most safety standards Solder lug, Fast-on tab styles available (see page 26)
- PCB mounting style minimizes space and provides economical installation
- Operating temperature: -25°C to +85°C (including temperature rise, see graph on page 55)
- UL approved low leakage version also available

Applications


- Digital equipment
- Personal computers and peripherals
- Measuring instruments
- Monitor and display units



Tested and found to be
IAW VDE 0565 Part 3



Circuit Diagram

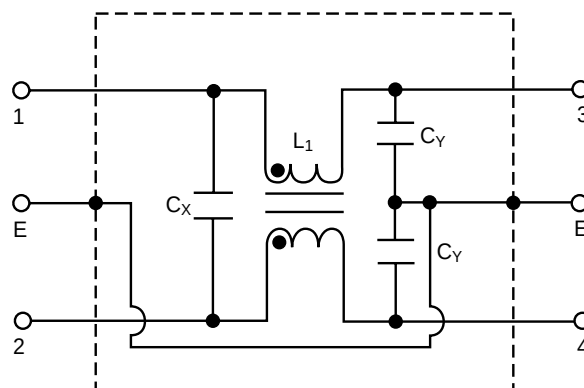

Specifications


Model	Rated Voltage (@ 50/60Hz)	Rated Current	Leakage Current (Max.)	Capacitance		Inductance (L ₁)	Temperature Rise (Max.)
				C _Y	C _X		
60-BPP-010-3-2	250VAC	1A	0.35mA	2200pF	0.022uF	6.0mH	30°C
60-BPP-010-3-4					0.047uF		
60-BPP-010-5-2			0.50mA	3300pF	0.022uF		
60-BPP-010-5-4					0.047uF		
60-BPP-020-3-2		2A	0.35mA	2200pF	0.022uF	2.4mH	
60-BPP-020-3-4					0.047uF		
60-BPP-020-5-2			0.50mA	3300pF	0.022uF		
60-BPP-020-5-4					0.047uF		
60-BPP-030-3-2		3A	0.35mA	2200pF	0.022uF	1.2mH	
60-BPP-030-3-4					0.047uF		
60-BPP-030-5-2			0.50mA	3300pF	0.022uF		
60-BPP-030-5-4					0.047uF		
60-BPP-060-3-2		6A	0.35mA	2200pF	0.022uF	0.53mH	45°C
60-BPP-060-3-4					0.047uF		
60-BPP-060-5-2			0.50mA	3300pF	0.022uF		
60-BPP-060-5-4					0.047uF		

Note: Test voltage: 1500VAC one minute, line to ground
Insulation resistance: 300 Mohm min. at 500VDC
Voltage drop: 1V max. at rated current
Weight: 50g
Input: Compatible with IEC-320


Power Entry Modules Bolt-in Right Angle Terminals for PCB Applications

60-BPP Series


Temperature Characteristics

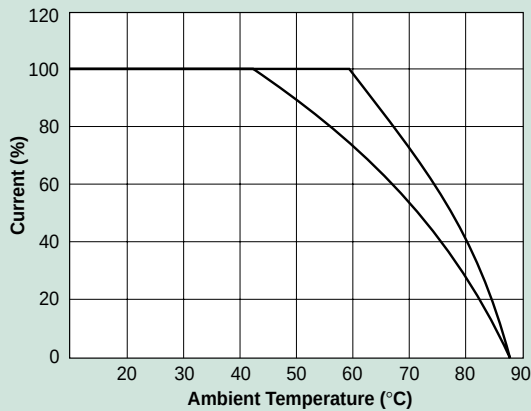


60-BPP PCB Mounting Type

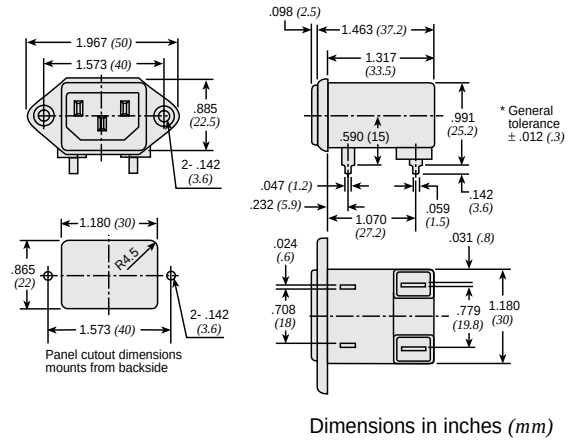


Common Mode

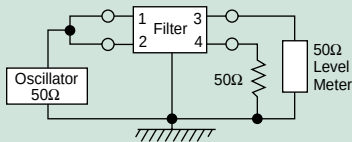


60-BPP-010;-020

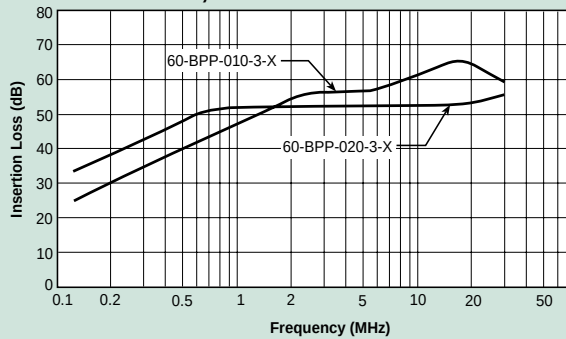


60-BPP-030;-060

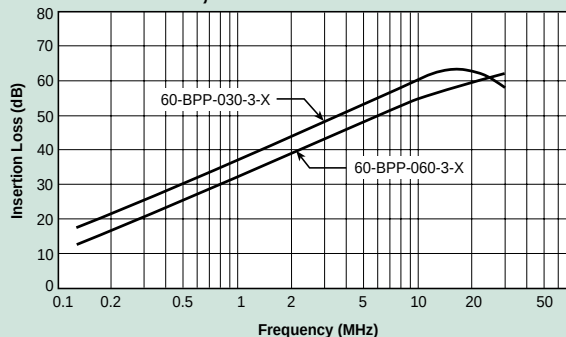

Normal Mode

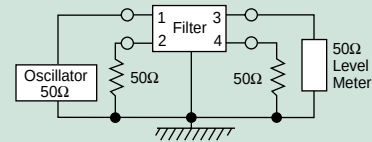

60-BPP-010;-020

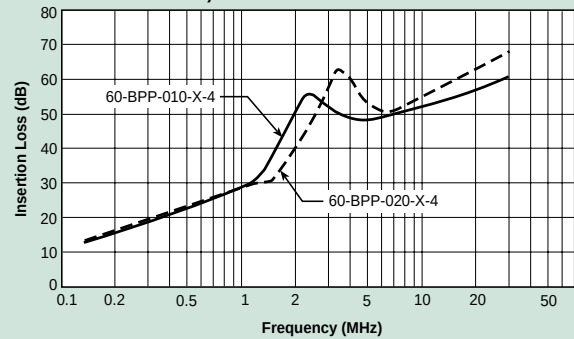

60-BPP-030;-060

