

Power Line Filters Single Stage Wire Leads

62-PML Series



Tested and found to be
IAW VDE 0565 Part 3

Features


- Compact design requires minimal real estate space
- Suitable for products that must conform to FCC and FTZ regulations
- Excellent attenuation for high voltage impulse
- Metal case provides effective shielding
- Excellent filtering characteristics for both normal mode and common mode
- Structure provides effective shielding for noise generated externally and internally
- Operating temperature: -25°C to +85°C (including temperature rise, see graph on page 65)

Applications

- Digital equipment
- Personal computers and peripherals
- Measuring instruments
- Medical equipment
- Factory automation equipment



Circuit Diagram

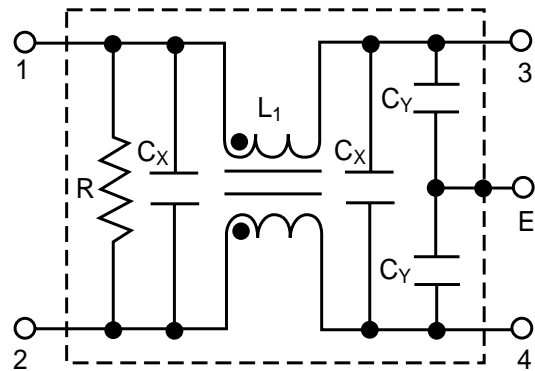

Specifications



Model	Rated Voltage (@ 50/60Hz)	Rated Current	Leakage Current (Max.)	Capacitance		Inductance (L ₁)	Temperature Rise (Max.)		
				C _Y	C _X				
62-PML-015-3-11	250VAC	1.5A	0.35mA	0.1uF		10.0mH	30°C		
62-PML-015-5-11			0.50mA					3300pF	
62-PML-030-3-11		3A	0.35mA			2200pF		4.3mH	
62-PML-030-5-11			0.50mA			3300pF			
62-PML-050-3-11		5A				0.35mA		2200pF	2.4mH
62-PML-050-5-11						0.50mA		3300pF	
62-PML-100-5-11						10A		0.50mA	

Note: All types are designed to meet the requirement of UL 1283, CSA 22.2. VDE 0565-3
 Test voltage: 1500VAC one minute, line to ground
 Insulation resistance: 300 Mohm min. at 500VDC
 Voltage drop: 1V max. at rated current
 Weight: 62-PML-015 Series: 3.06 ounces (87 grams)
 62-PML-030 Series: 3.17 ounces (90 grams)
 62-PML-050 Series: 3.28 ounces (93 grams)
 Discharge time: 0.4 sec. max.



Power Line Filters Single Stage Wire Leads

62-PML Series

Temperature Characteristics

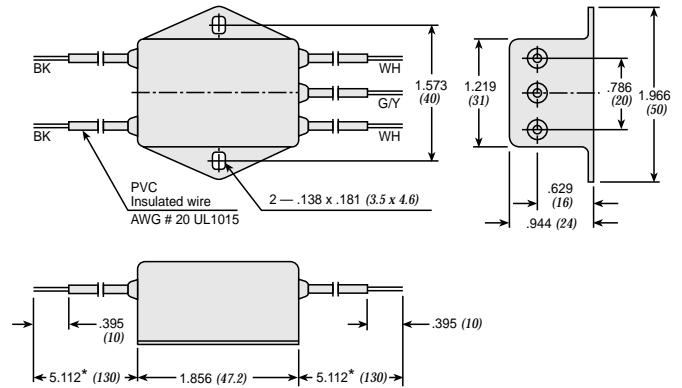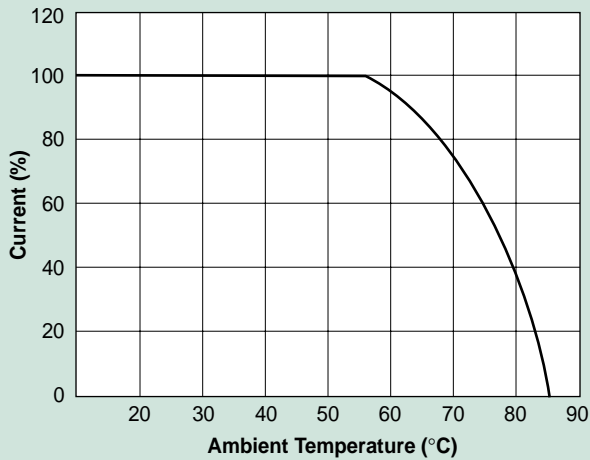

Common Mode

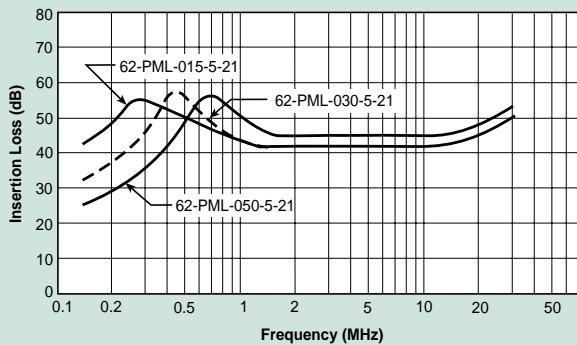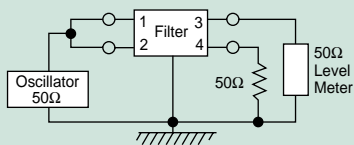

Normal Mode

